



福州市闽清力鑫电器有限公司

产品目录



福州市闽清力鑫电器有限公司

地址：福建省福州市闽清县隔兜村观音阁390号

手机：13950373473

Q Q：942693323

邮箱：942693323@qq.com



福州市闽清力鑫电器有限公司


公司简介/Company profile

福州市闽清力鑫电器有限公司是一家集电力金具配套产品设计、生产、销售为一体的现代化专业制造商,坐落在福州市闽清县观音阁。

力鑫电器坚定不移地秉承“精心研发、细心生产、诚信营销、关心员工、全心为客”的理念,不断开发新产品,开拓新市场,深受国内外顾客的欢迎,产品畅销全国各地,远销北美、南美洲、俄罗斯、亚洲等国家,深受客户一致好评。

本公司生产基地52800平方米,有一流的标准厂房和宽敞的场地空间,拥有胶木、注塑,和五金配件三大基础车间,自主生产五金配件和精密五金注塑模具的生产,研发,具有严格管理的装配车间和包装车间,专业生产开关、插座、插头、灯座、开关面板、闸刀开关、配电箱、接线盒等电器,已通过ISO9001国际质量体系认证及相关证书,秉承“质量是生命”的企业信条,交接货即时、快捷,价格合理、公道

力鑫电器有限公司真诚期待与您的合作,共同发展,开创未来!

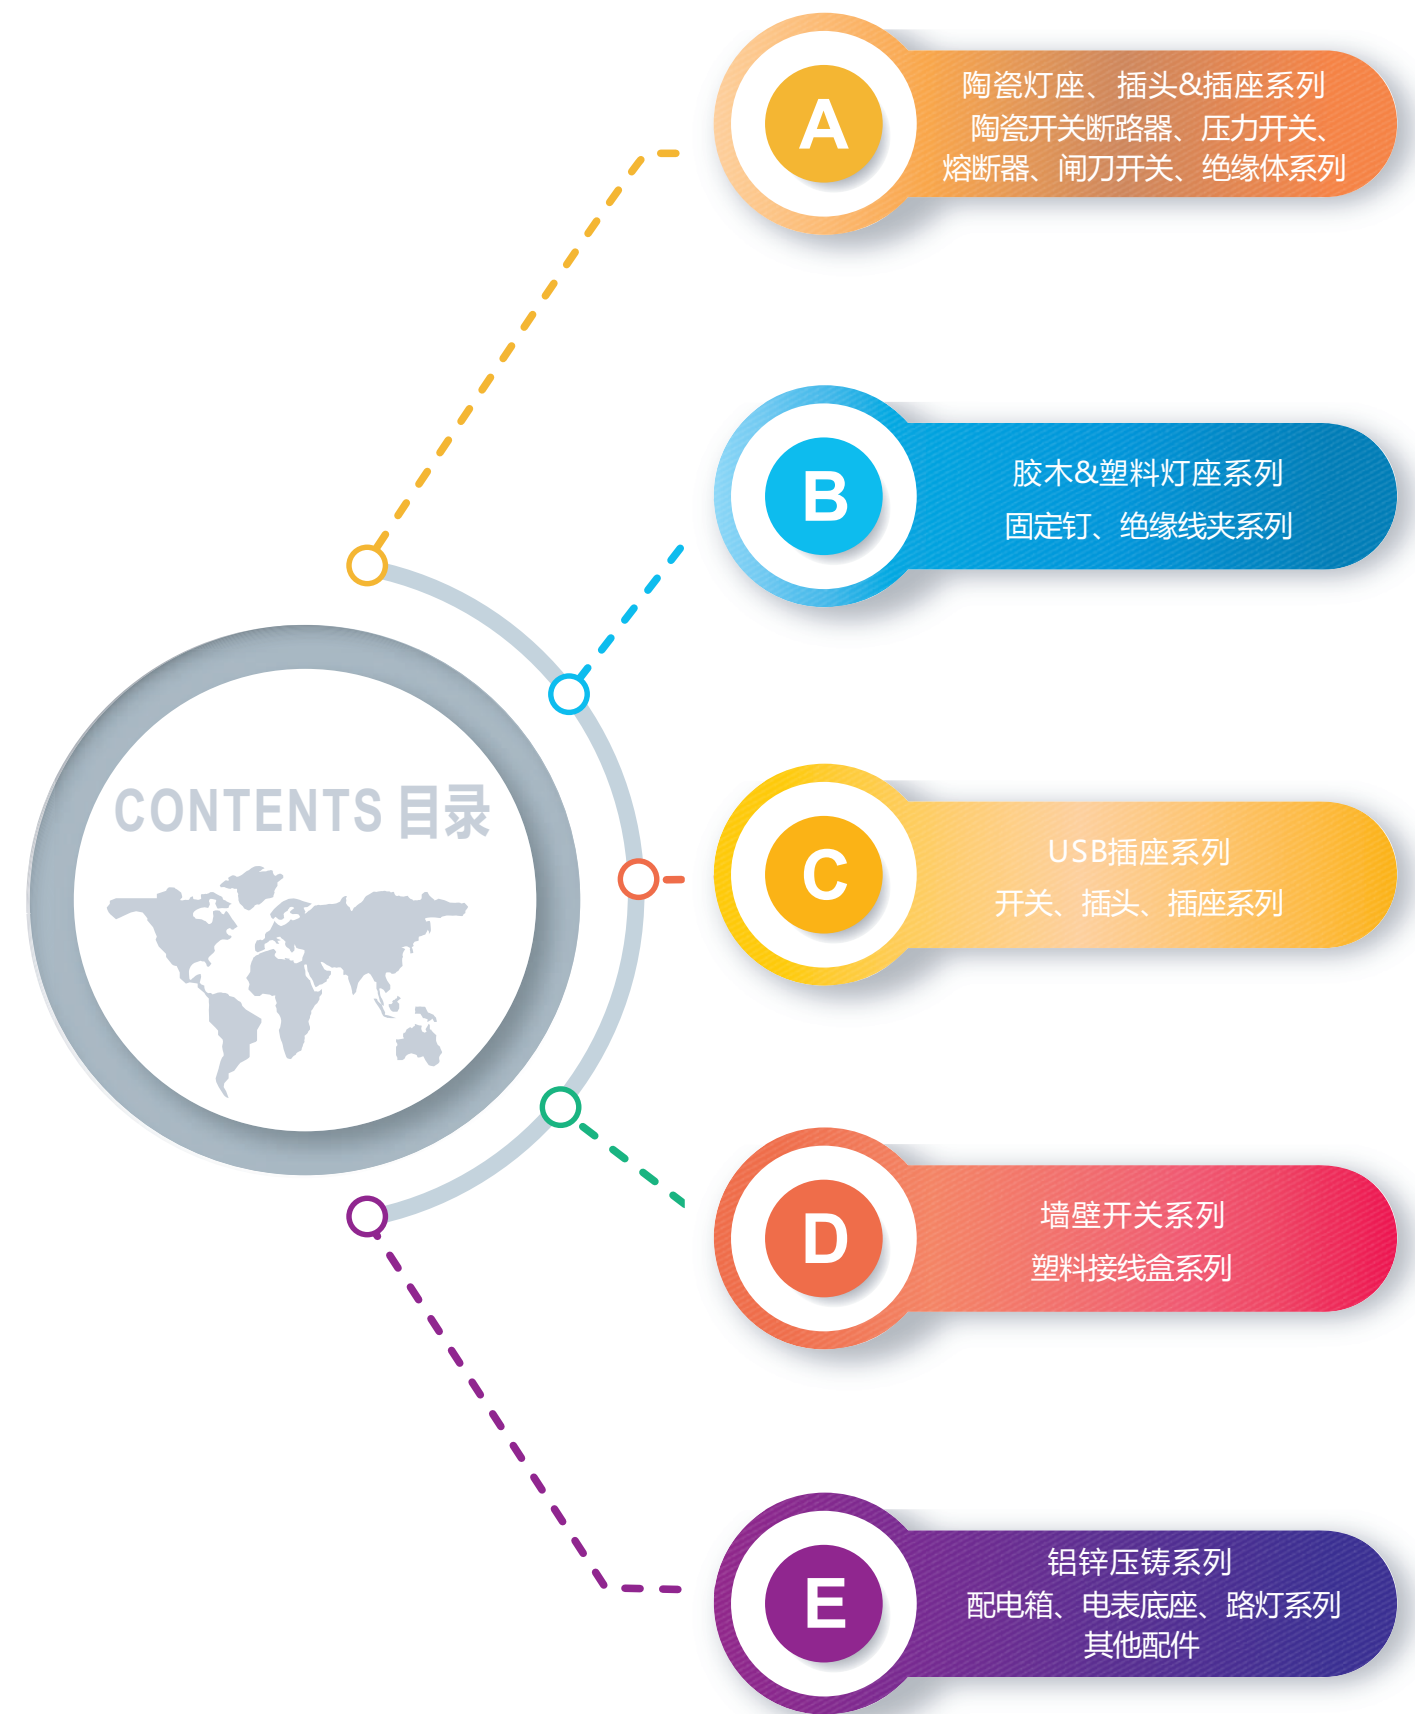


A 陶瓷灯座系列

陶瓷插头&插座、开关断路器、压力开关
熔断器、闸刀开关、绝缘体系列




陶瓷灯座 CERAMIC LAMPHOLDER

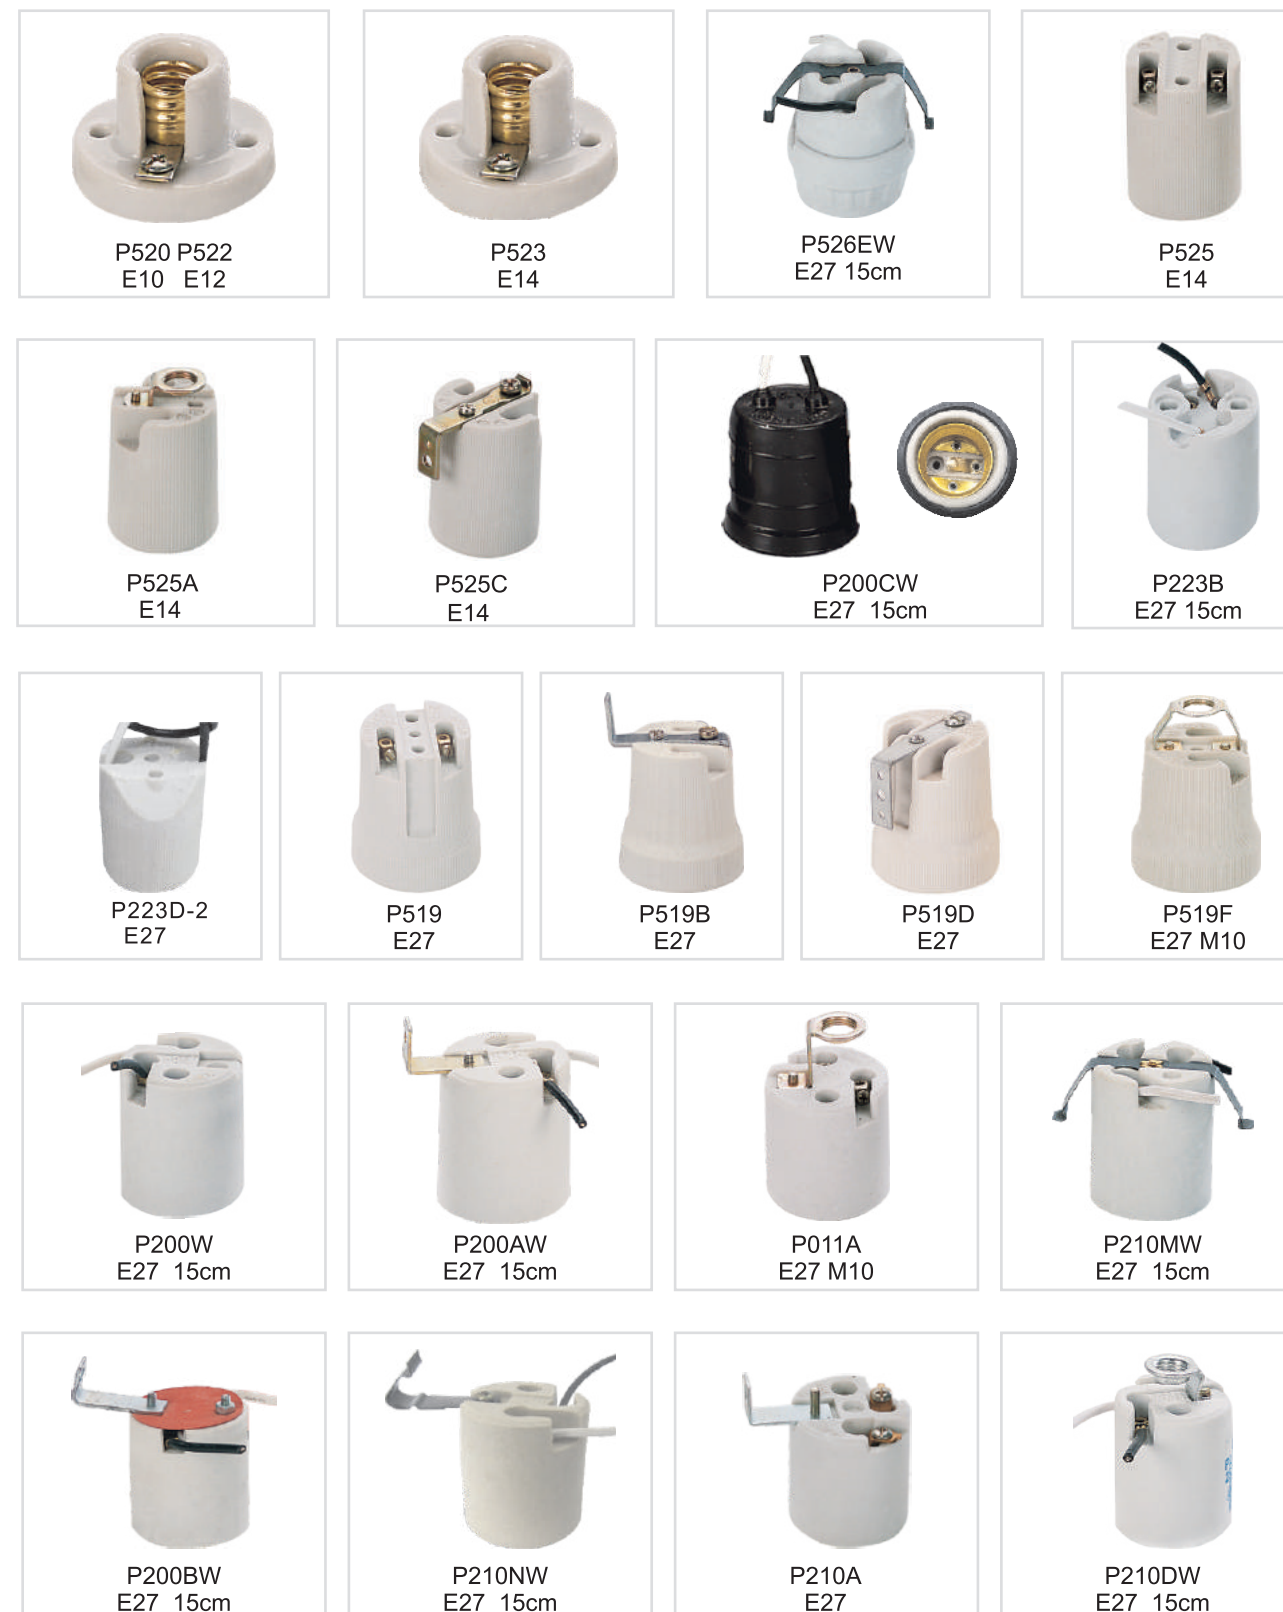

陶瓷灯座 CERAMLC LAMPHOLDER



陶瓷灯座 CERAMLC LAMPHOLDER

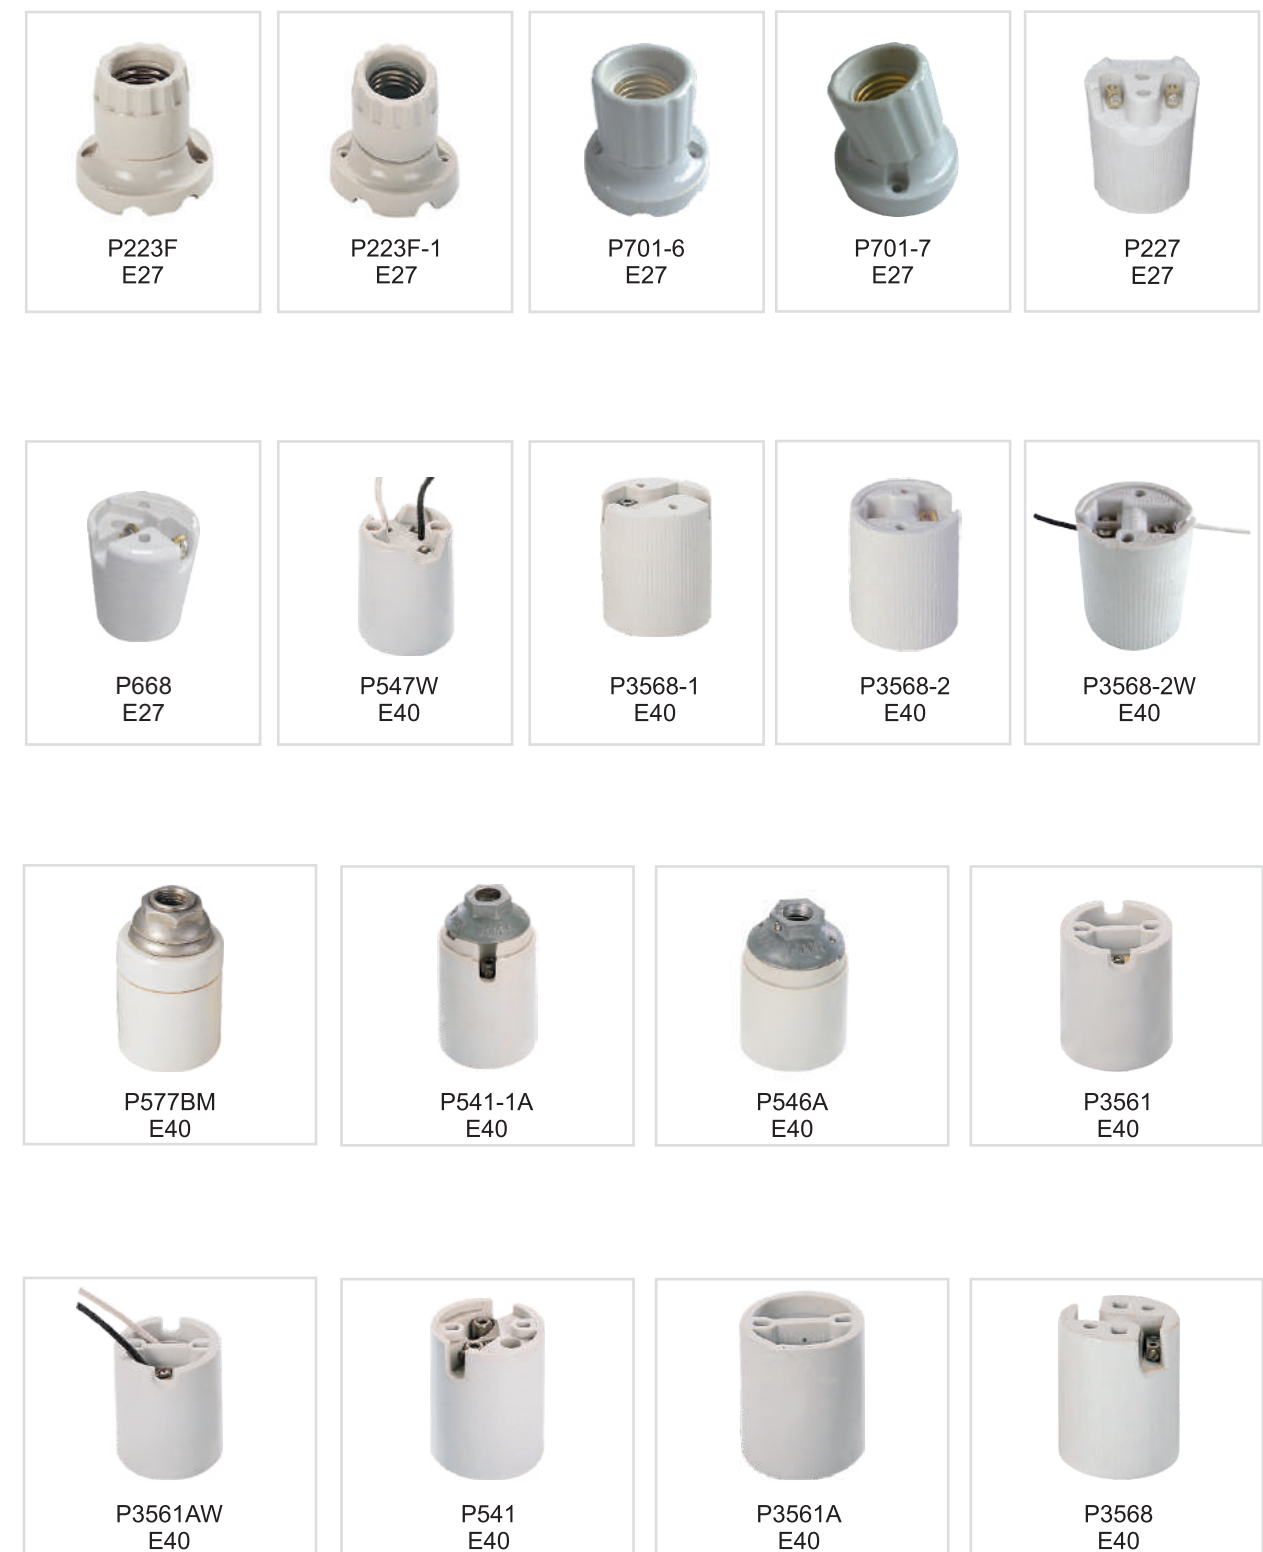

陶瓷灯座 CERAMIC LAMPHOLDER



铜&铁镀铜灯座 COPPER&IRON PLATED COPPER LAMPHOLDER




卤素灯座 HALOGEN LAMPHOLDER



陶瓷接线端子

CERAMIC TERMINAL BLOCKS

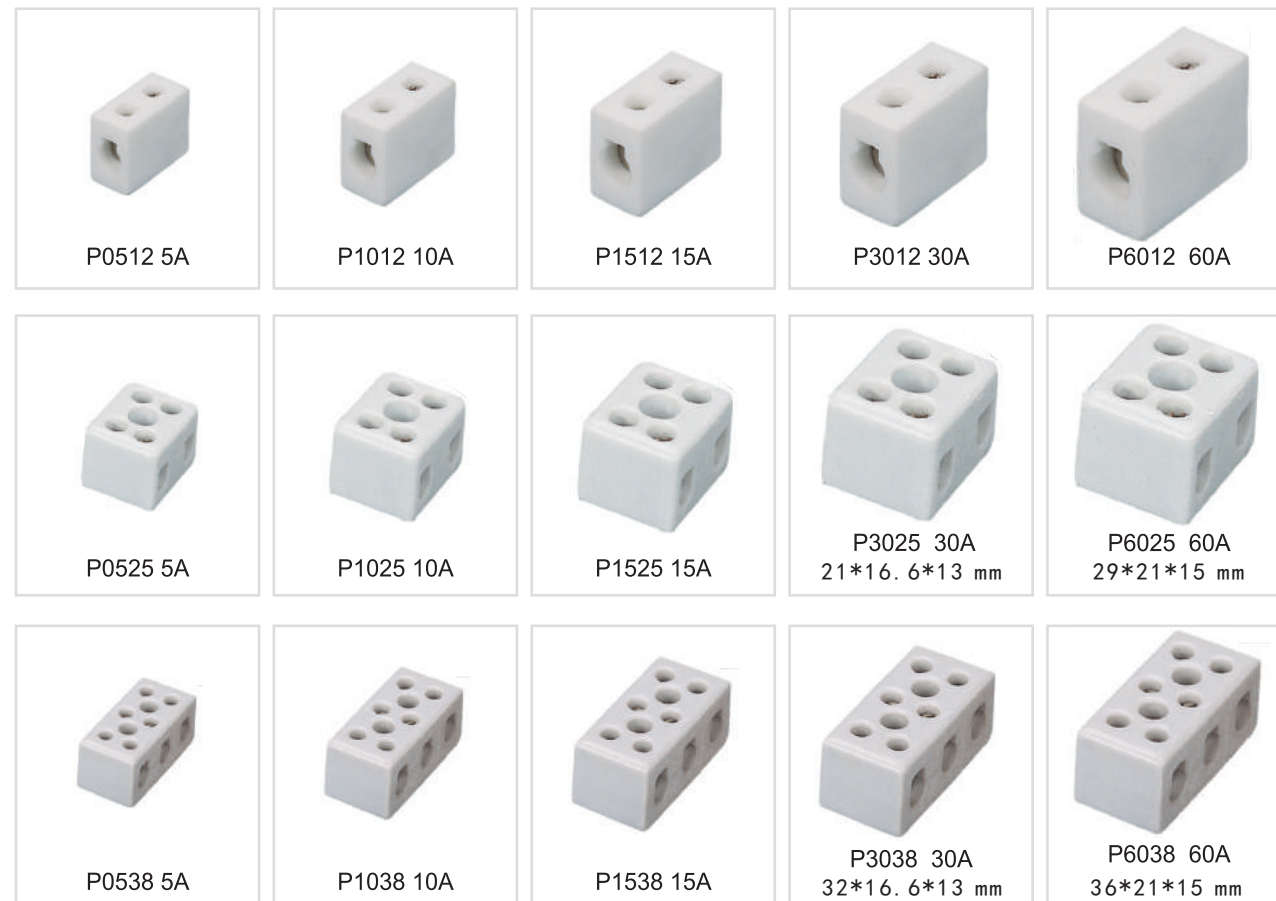

带支架卤素灯座

HALOGEN LAMPHOLDER WITH BRACKET



陶瓷插头&插座

CERAMIC PLUG&SOCKET



开关断路器

CIRCUIT BREAKER





压力开关

PRESSURE SWITCH




闸刀开关 KNIFE SWITCH

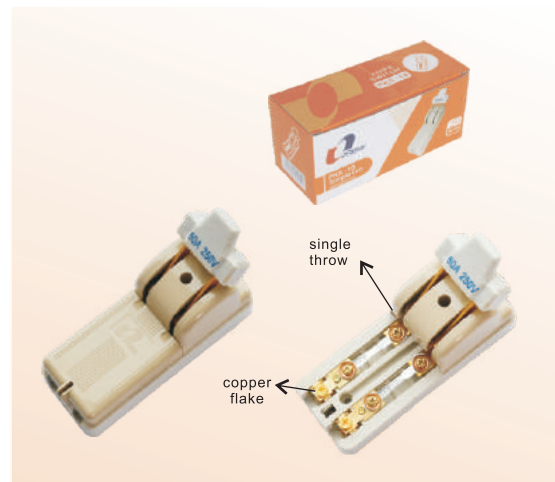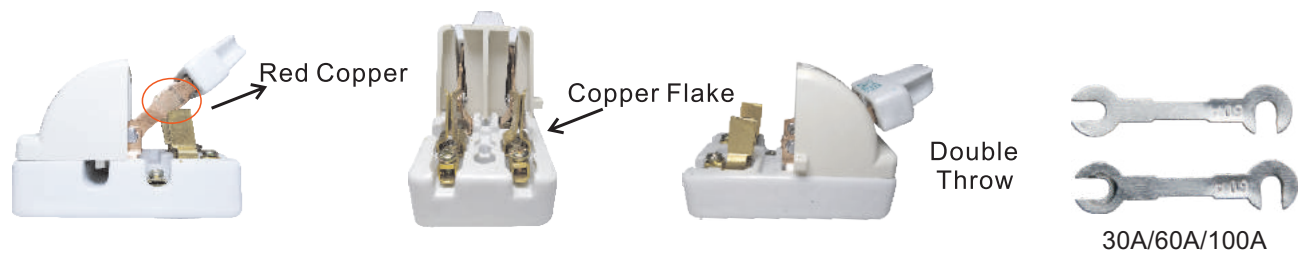

PKS-18

STYLE	MODEL	QTY/CTN (PCS)	G.W/N.W (KGS)	MEAS (CM)
Single throw	PKS-18 2P30AS	48	18/16	35*30*27
	PKS-18 2P60AS	24	18/16	35*30*22
	PKS-18 2P100AS	12	20/18	40*30*28

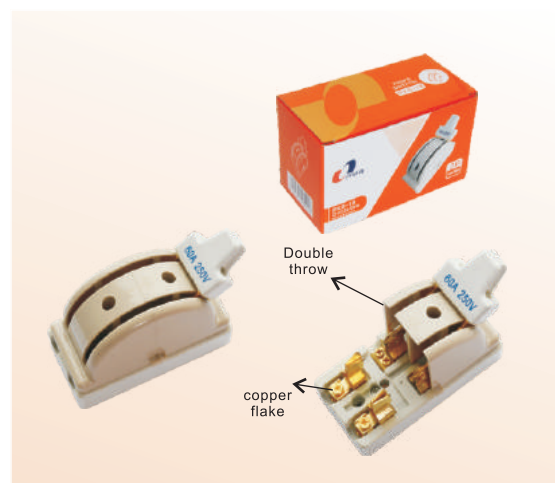


PKS-18

STYLE	MODEL	QTY/CTN (PCS)	G.W/N.W (KGS)	MEAS (CM)
Double throw	PKS-18 2P30AD	48	18/16	40*30*22
	PKS-18 2P60AD	24	15/13	36*27*25
	PKS-18 2P100AD	12	18/16	39*23*21


闸刀开关 KNIFE SWITCH



STYLE	MODEL	WITH LIGHT	QTY/CTN (PCS)	G.W/N.W. (KGS)	MEAS (CM)
Double throw	E2P32AD	✓	60	16/15	56×34×24.5
	E2P63AD	✓	30	11/13	39×32.5×31
	E2P100AD	✓	24	16/14	51.5×36.5×22.5
	E2P225AD		8	13/11	46.5×22×30
	E3P32AD		24	12/11	43×29×26
	E3P63AD	✓	16	11/10	49.5×34.2×21.3
	E3P100AD	✓	12	12/11	41.2×36.6×24.5
	E3P225AD		4	10/9	40.6×27.8×35.2
	E4P63AD		12	12/11	54×42×27
	E4P100AD		8	12/11	47.2×41.2×29.3
	E4P160AD		8	13/12	54×42.3×32.5
	E4P225AD		4	12/11	47.5×30.3×35.6

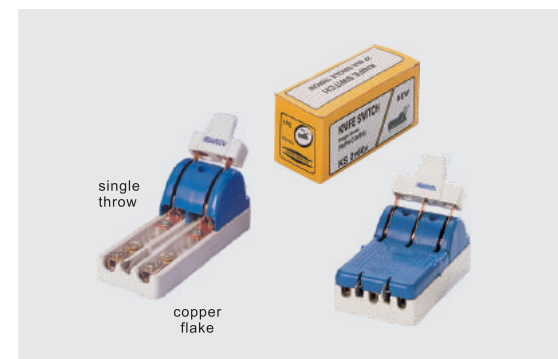

STYLE	MODEL	QTY/CTN	G.W/N.W(KG)	MEAS(CM)
Single throw	2P20AS	60pcs	20/18	35.5×25×30.5
	2P30AS	60pcs	27/25	43.5×26×36
	2P60AS	36pcs 40PCS	23/21	54×28.5×33 36×35×32.5
	2P100AS	12pcs	20/18	38×21.5×31
	2P200AS	6pcs	22/20	39×29×30
	3P20AS	48pcs	21/19	38×32×30
	3P30AS	40pcs	27/25	41×30×27
	3P60AS	30pcs	25/23	46×36×25
	3P100AS	12pcs	21/19	37×28×30

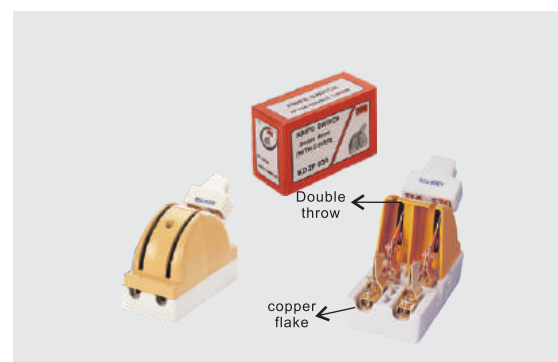

STYLE	MODEL	QTY/CTN	G.W/N.W(KG)	MEAS(CM)
Double throw	2P20AD	60pcs	23/21	37.5×31.5×31
	2P30AD	60pcs	26/24	39×30.5×32
	2P60AD	30pcs	26/24	40.5×35.5×32
	2P100AD	12pcs	27/25	42.2×20×40
	3P20AD	60pcs	21/19	48.5×37×23
	3P30AD	40pcs	28/26	42×29.5×33.5
	3P60AD	20pcs	31/29	52×36×22
	3P100AD	12pcs 6pcs	24/22	42×37.5×26 38×22×26

熔断器 FUSE




PBU-100
500V 100A

陶瓷绝缘体 CERAMIC INSULATOR



线轴式绝缘子/蝶式绝缘子 SPOOL INSULATORS/SHACKLE INSULATORS

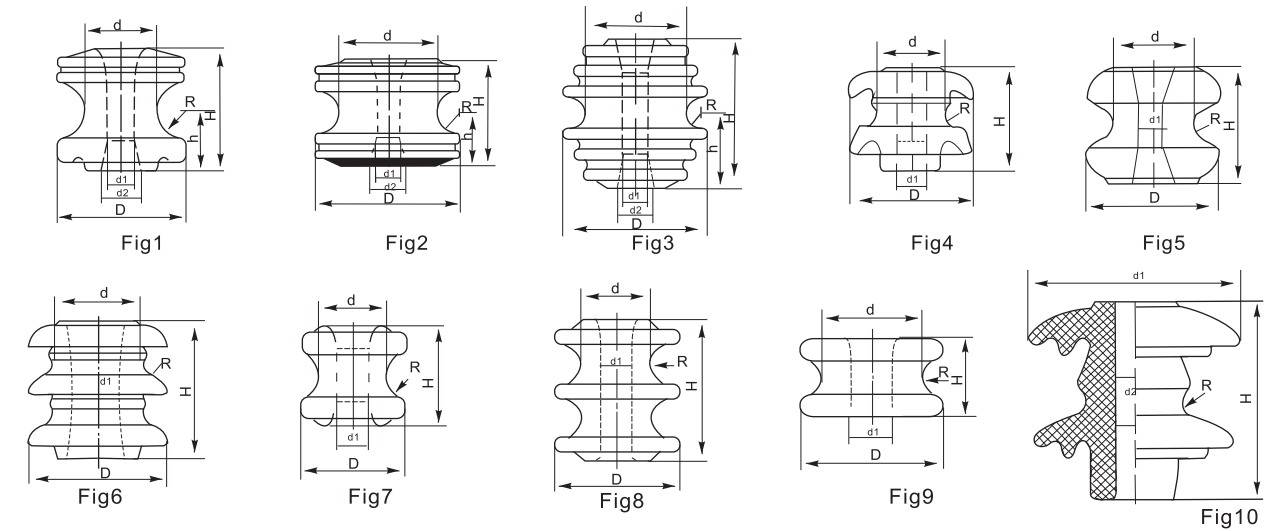

主要尺寸和性能 MAIN DIMENSIONS AND STANDARD PARTICULARS

美标等级 Class ANSI 产品编号 Cat No	53-1	53-2	53-3	53-4	53-5	ED-1	ED-2	ED-3	ED-4	ED-2(C)	ED-2(B)	ED-2(B)	R-8	R-6	R-2	R-1	1617	1618-1	1618-2
图号 Fig	2	1	2	2	3	4	4	4	4	6	4	4	9	8	7	7	5	5	5
主要尺寸 Main Dimensions (mm)	H	54	76	81	78	105	90	75	65	50	80	76	32	80	76	54	65	75	75
	h	27	38	40.5	38	52.5	-	-	-	-	-	-	-	-	-	-	-	-	-
	D	57	79	76	105	102	100	80	70	60	80	89	89	57	70	80	57	76	89
	d	45	45	45	73	73	50	42	36	30	50	48	48	40	40	54	39	46	52
	d ₁	18	18	18	18	18	22	20	16	16	22	21	17.5	17.5	18	17	17	17.5	17
	d ₂	22	24	24	24	24	-	-	-	-	-	-	-	-	-	-	-	-	-
机械破坏负荷 Mechanical Failing Load (KN)	R	11	18	11	16	11	12	10	8	6	10	10	7	7	17	12	9	13	12.5
		9	13.6	18	20	27	12	10	80	5	13	13	-	2.4	-	-	9	10	13
闪络电压(不小于) Minimum Flashover Voltage	工频 Power-frequency (KV)	20	25	25	25	35	22	18	16	14	25	25	25	-	12	-	20	20	25
	湿 Wet	8	12	12	12	18	10	9	7	6	15	12	12	15	15	15	9	9	12
重量 Weight(kg)	垂直 Upright	10	15	15	15	25	-	-	-	-	-	-	-	-	-	-	-	-	-
	水平 Level	10	15	15	15	25	-	-	-	-	-	-	-	-	-	-	-	-	-

主要尺寸的性能 MAIN DIMENSIONS AND STANDARD PARTICULARS

型号 TYPE	图号 Fig	额定电压 Rated Voltage (kv)	工频耐压 Power-frequency withstand voltage			抗弯强度 Cantilever Failing Load (KN)	爬电距离 Creepage Distance (mm)	主要尺寸 Main Dimensions (mm)				重量 Weight (kg)
			干闪络 Dry (KV)	湿闪络 Wet (KV)	击穿 Puncture (KV)			H	D1	D2	R	
E-3	10	3	30	15	39	120	100	120	130	20	12	1.55
E-6	10	6	50	26	65	200	130	145	150	26	12	2.35
E-10	10	10	60	32	78	200	180	175	180	26	12	3.90

B 胶木&塑料灯座系列

固定钉、绝缘夹系列



胶木&塑料灯座 BAKELTE&PLASTICLAMPHOLDER

 PN-14HS E14 M10	 PN-14H E14 M10	 PN-14SR E14 M10	 E14 CORE	 PBM-14E black E14 M10	 PBMR-14M E14 M10
 PN-27J E27 M10	 PN-27N E27 M10	 PN-27K E27 M10	 E27 CORE	 PBM-27 E27 M10	 PBMR-27MN E27 M10
 PBL-741 E14	 PBL-742 E14	 PBL-744 E27	 PBL-745 E27	 PBL-743 E27	 PBL-746S E27
 PBL-746 E27	 PBL-022 E27 M10	 PBL-06S	 PBL-089 E27	 PBL-037 E27	

胶木&塑料灯座 BAKELITE&PLASTIC LAMPHOLDER



胶木&塑料灯座 BAKELITE&PLASTIC LAMPHOLDER



胶木&塑料灯座 BAKELITE&PLASTIC LAMPHOLDER



胶木&塑料灯座 BAKELITE&PLASTIC LAMPHOLDER



转换灯座 ADAPTOR



PBT-22
E40-E27



PBT-21
E14-E27



PBT-6
E27-GU10



PBT-19
E27-B22



PBT-7
E27-E12



PBT-8
E27-MR16
CERAMIC



PBT-4
E27-GU24



PBT-3
B22-E27



PBT-10
E27-E14



PBT-11
E40-E27



PBT-12
E40-G12
CERAMIC



PBT-2
GU10-E27



PBT-13
E27-E40



PBT-14
E40-GZ10
CERAMIC



PBT-15
E40-E40



PBT-1
G10-E14



PBT-3XE27
E27-3XE27



PBT-E40
E40-3XE27



PBT-26




PBT-27

固定钉 Fixing Nail




Fixing Body	
Material	Nylon
Color	Black
Anchor Length	34mm
Total Length	68.79mm
Nail	
Material	Galvanized steel
Size	3x70mm
Nylon Cable Ties	
Material	Nylon
Colour	Black
Size	220x5mm

绝缘耐张线夹 Anchoring clamp

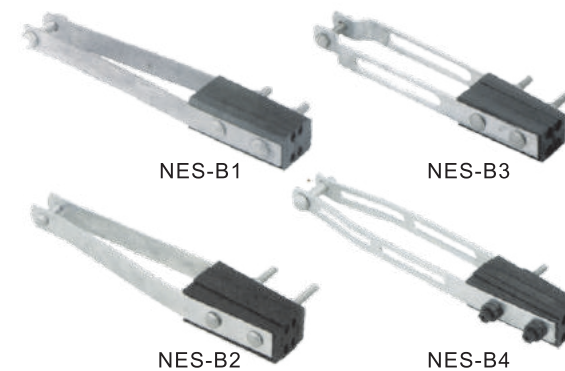

Model	Conductor cross-section (mm ²)
NES-B1	4X(16-35)
NES-B2	4X(50-120)
NES-B3	4X(25-120)
NES-B4	4X(95-150)


Material: Mild steel, nylon plus fiber glass
Product property: It is used to terminate 4-core of aerial bundle conductor. Its function is fixing and tightening the insulation conductor

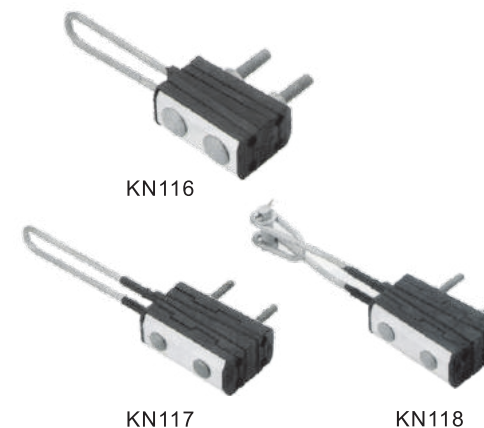

Model	Conductor cross-section (mm ²)
Kn116	4X(25-35)
Kn117	4X(50-120)
Kn118	4X(50-120)

For the termination of 4-core LV ABS cable with hook fixing. The clamps have strong springs which keep the clamp in an open position during the installation of conductors. The clamping action functions through wedges. The body is made of weather resistant aluminium alloy and the plastic parts of special fibreglass reinforced plastic.

绝缘耐张线夹 Anchoring clamp

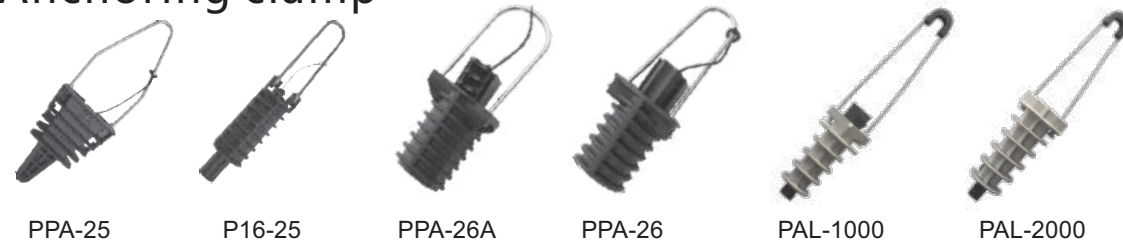

Material: Nylon plus fiber glass
Product property: The plastic anchoring clamp is suitable for insulated low-voltage ABC cable. It is also suitable for multiple conductors. Easy installation and perfect insulated function. It is in accordance with the NFC 33-042

Model	Cross-section (mm ²)
PPA-25	2X16-4X25
P16-25	16-70
PPA-26	4-22
PPA-26A	2x4/4x25
PAL-1000	25-35
PAL-2000	75-95

绝缘穿刺线夹 Insulation piercing connectors




Model	Conductor Range (mm ²)	
	Main	Tap
PPC-1	10-95	1.5-10
PPC-2	16-95	4-35
PCC-3D	25-150	25-150
ABS	25-70	6-35
1.1A	16-95	
1.1B	16-95	

C USB 插座系列

开关、插头、插座系列



USB插座系列 USB DHARGING SERLES

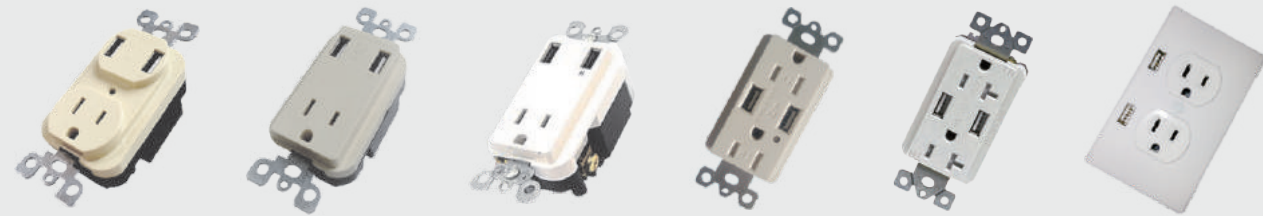

PBE-6USB
with USB ports

PBE-7USB
with USB ports

PBE-8USB
with USB ports

PBE-8GUSB
UL
with USB ports

PBE-11USB
120V-DC 5V 2.1A
with USB ports

PBE-9USB
with cover
with USB ports



PBE-12USB

PBP203B
2 outlets current tap
with USB ports

PBP211
3 outlets surged
protected current tap
with USB ports

PBP210
3 vertical outlets
current tap
with USB ports

PBP212
2 outlets current tap
with USB ports
light

PBP212B
2 outlets current tap
with USB ports
light



PBP206B
3 outlets surged
protected current tap
with USB ports (Max
4.2A)

PBP204B
2 outlets surged
protected current tap
with USB ports

PBP206C
3 outlets surged
protected current tap
with USB ports

PBP207B
3 outlets surged
protected current tap
with USB ports (Max
4.2A)

PBP209B
6 outlets surged
protected current tap
with USB ports

排插 EXTENSION SOCKET



PBSW-37B



PBSW-37



PBSW-37A



PBSW-37E



PBSW-37D



PBSW-1101



PBSW-1004



PBSW-1204



PBSW-1007

USB排插系列

USB CHARGINGPORT SERIES



PITS-6



PBSW-37USB-5
USB O/P:DC5V
Max.:2.1A



PBSW-37USB-3
USB O/P:DC5V
Max.:2.1A



PBSW-66A
USB O/P:DC5V
Max.:2.1A



PBSW-37USB-4
USB O/P:DC5V
Max.:2.1A



PBSW-64B
USB O/P:DC5V
Max.:2.1A



PBSW-64C
USB O/P:DC5V
Max.:2.1A




PBSW-65B
USB O/P:DC5V
Max.:2.1A



PBSW-67A
USB O/P:DC5V
Max.:2.1A



PBSW-68
total 10 outlets

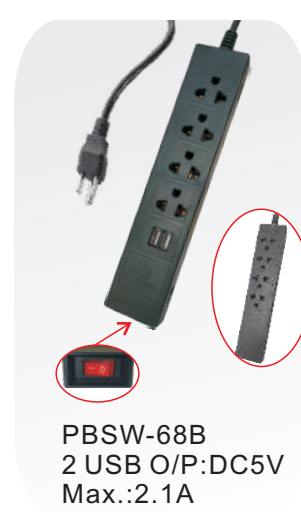

PBSW-68B
2 USB O/P:DC5V
Max.:2.1A
total 8 outlets



PBSW-69



PBSW-69B
USB

开关&插座

SWITCH&SOCKET



PBS-4



PBS-5



PBS-5B



PBS-5C



PBS-5D



PBS-5G
plastic base



PBS-5F



PBS-5E
Metal cover



PBS-82



PBK-95



PBS-3



PBS-3A



PBS-32



PBS-33



PBS-34



PBP008



PBP007



PBP021 15A
PBP021-1 30A



PBP010 20A



PBP009 50A



PBP011 50A
PBP011-1 20A
3P



PBP012-2 50A



PBP012 50A



PBP012-1 50A



PBP013 50A

开关&插座

SWITCH&SOCKET



开关&插座

SWITCH&SOCKET



开关&插座 SWITCH&SOCKET



PBK-101 1 Way PBK-101F With Fluorescent 1 Way PBK-102 2Way PBK-102F With Fluorescent 2Way PBK-105 PBK-104 Door Bell



PBK-P001 PBK-P002 PBK-P003 PBK-P004 PBK-P005 PBK-P006



PBK-21 PBK-18A PBK-19 PBK-18 PBK-70 PBK-63



PBK-08 White Small PBK-12 Big PBK-13 Door Bell PBK-72 Door Bell PBK-202



PBK-65A PBK-20 PBE-4 PBE-4A PBE-4F (1Way) (2Way)

插座 SOCKET



PBK-300



PBK-301



PBK-302



PBK-303



PBS-TA1



PBS-TA2



PBS-TA3



PBS-TA4



PBS-TA5



PBS-TA6



PBS-TA7 Door Bell



PBS-TA8 2 Way



PBK-93



PBK-91



PBK-92



PBC-J



PBK-97



PBK-96



FACE



PBA-P8



PBA-P2



PBA-P3



PBA-P7

插座 SOCKET



PBS-1



PBS-2



PBA-P27A



PBA-P27



PBA-P28A



PBA-P28



PBA-8A



PBS-6



PBS-7



PBS-8



PBS-8B



PBS-37



PBS-38



PBS-35



PBS-36



PBS-39



PBS-41



PBS-8C

插头&插座 PLUG&SOCKET



PBP317AH



PBP317H



PBP316AH



PBP316H



PBP023 15A
PBP023-1 30A



PBP020 15A
PBP020-1 30A



PBP312



PBP312A



PBP311



PBP311A



PBP316



PBP316A



PBP317



PBP317A



PBP29B 20A



PBP318



PBP318A



PBP320



PBP320A



PBP28



PBP28A



PBP29



PBP31



PBP29A



PBP29AB

插头&插座 PLUG&SOCKET



PBA-P79B



PBA-P79E



PBA-P79A



PBA-P29A



PBA-P29



PBA-P93C



PBA-P93



PBA-P93A



PBP109



Plug Style



PBP122



PBA-P30



PBA-P30A
6 Outlets Surge Protected
Current Tap With
Indicators



PBP121



PBA-P30S




PBA-P93B




PBP307B



PBP126



PBP116



PBP127



PBP116-1

插头&插座 PLUG&SOCKET



PBP-E3S
Socket PBP-E3
Plug



PBP-E2S
Socket PBP-E2
Plug



PBP51



PBP60



PBP61



PBP-EP006



PBP-EP001



PBP-EP001-1



PBP-EP007
2P




PBP-EP007-1
3P



PBA-P95



PBA-P90G



PBP-EP005S
Socket



PBP-EP005
Plug



PBP103



PBP105



PBP106



PBP305B



PBA-P91



PBA-P64



PBA-P64A



PBA-P61B



PBP004A



PBP003A



PBA-P61C



PBP003



PBP-EP004



PBA-P67




PBP125

插头&插座 PLUG&SOCKET



插头&插座 PLUG&SOCKET

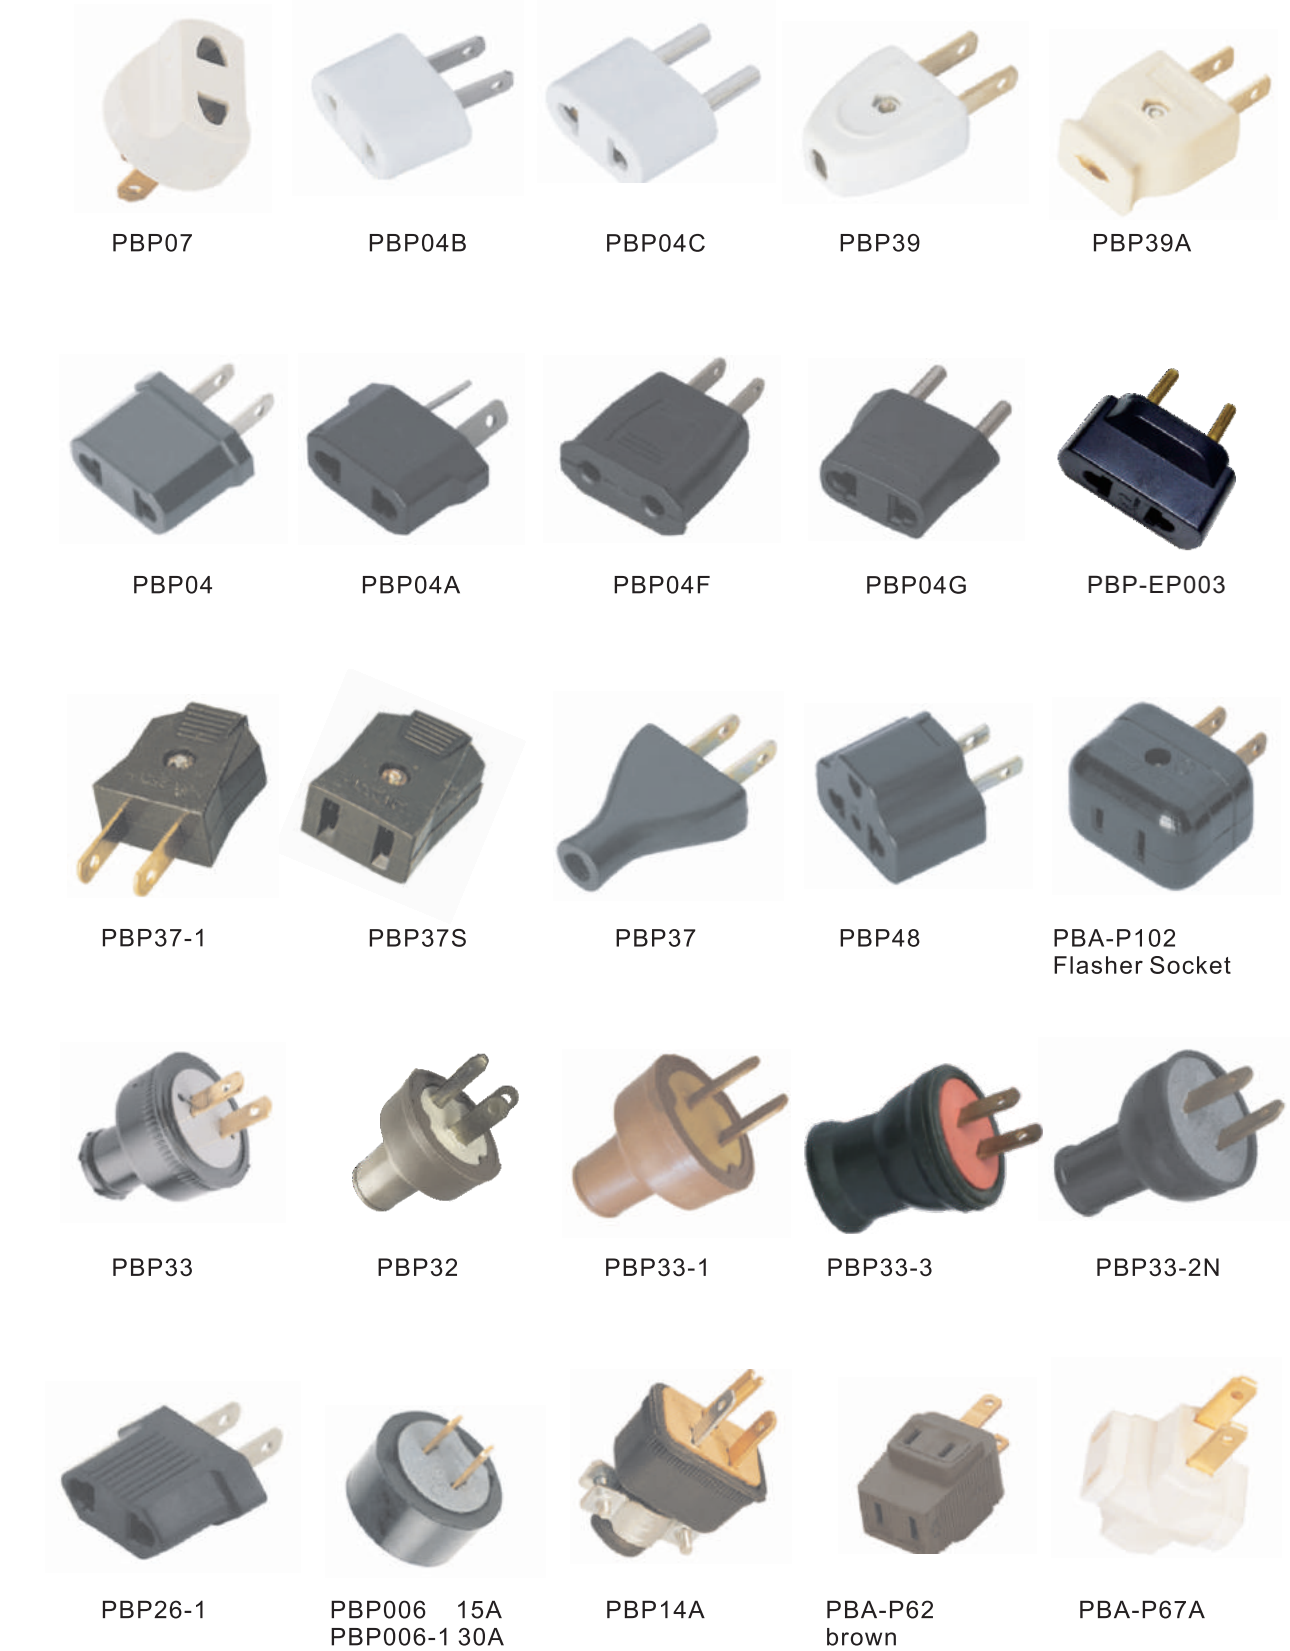

俄罗斯市场

RUSSIA MARKET



PBP-R119



PBP-R119-1



Back



PBP-R120



PBP-R116



PBP-R116-1



PBP-R118



PBP-R118-1



PBP-R117



PBP-R117-1



PBP-R120



PBP-R120-1



PRU-1001



PRU-1002



PRU-1003



PRU-1004



PRU-1005



PRU-1006



PRU-1007



PBT-R014+R015



PBT-R014+R016

俄罗斯市场

RUSSIA MARKET



PBP-R101



PBP-R102



PBP-R103



PBP-R109
Without earth ground



PBP-R109-1
With earth ground



PBP-R101W



PBP-R102W



PBP-R103W



PBP-R108
Without earth ground



PBP-R108-1
With earth ground



PBP-R121



PBP-637



PBP-R001



PBP50P



PBP50S



PBP-R007



PBP-R121



PBT-E27



PBP-R122



PBP-R123



PBP-R125



PBP-R126



PBP-R127



PBP-R128



PBP-R129



PBP-R131



PBP-R132



PBP-R133



PBP-R135

D 墙壁开关系列

塑料接线盒系列



墙壁开关：A系列 WALL SWITCH：A SERIES



PBK-A033



PBK-A001



PBK-A002



PBK-A003



PBK-A020



PBK-A005



PBK-A025



PBK-A018



PBK-A015



PBK-A013



PBK-A019



PBK-A006



PBK-A009
Bell Switch



PBK-A014



PBK-A017 USB



PBK-A008
TEL



PBK-A011
Dimmer



PBK-A012
TV



PBK-A017
NET



PBK-A016
TEL+TV



PBK-A030

墙壁开关：U系列

WALL SWITCH：USERLES



墙壁开关：U系列

WALL SWITCH：USERLES



墙壁开关：C系列

WALL SWITCH：CSERLES



PBK-C005
1 Way/2 Way



PBK-C006
1 Way/2 Way



PBK-C007
1 Way/2 Way



PBK-C011



PBK-C032



PBK-C009



PBK-C010



PBK-C013



PBK-C008



PBK-C021



PBK-C035



PBK-C015



PBK-C034



PBK-C014



PBK-C022



PBK-C023



PBK-C020



PBK-C036



PBK-C025



PBK-C026



PBK-C027
Door bell



PBK-C028
TEL



PBK-C029
NET



PBK-C030
TV



PBK-C031
Dimmer



PBK-C033
TEL+TV



PBK-C034

墙壁开关：EA系列

WALL SWITCH：EASERLES



PBK-EA1013



PBK-EA1101



PBK-EA1102



PBK-EA1103



PBK-EA1104



PBK-EA1012



PBK-EA1009



PBK-EA1007



PBK-EA1112



PBK-EA1010



PBK-EA1113



PBK-EA1008



PBK-EA1111



PBK-EA1105



PBK-EA1110



PBK-EA1015



PBK-EA1014



PBK-EA1011



PBK-EA1106
Door bell



PBK-EA1107
TV



PBK-EA1108
TEL



PBK-EA1109
TV+TEL



PBK-EA1003
Dimmer 600W

墙壁开关盖 WALL SWITCH COVER

PBC-A003 10.8*6.7CM	PBC-A004 10.8*6.7CM	PBC-A001 11.5*11.5CM	PBC-A005 11.5*11.5CM	PBC-A002 Dia 9CM	PBC-A006 Dia 11.5CM
PBC-D ABS	PBC-A ABS	PBC-M3 BAKELITE	PBC-B ABS	PBC-BL WHITE ABS	PBC-AR ORANGE
PBC-A007	PBC-A008	PBC-M1 ABS	PBC-F ABS	PBC-FB ABS	PBC-FC ABS
PBC-N5 ALUMINUM	PBC-N5A ALUMINUM	PBC-N1 ALUMINUM	PBC-N2 ALUMINUM	PBC-N3 ALUMINUM	
PBC-N5B ALUMINUM	PBC-N6A ALUMINUM	PBC-N4A ALUMINUM	PBC-N2A ALUMINUM	PBC-N7A ALUMINUM	
PBC-S8A UL STAINLESS STEEL	PBC-S8 UL STAINLESS STEEL	PBC-S8D UL STAINLESS STEEL	PBC-S8B UL STAINLESS STEEL	PBC-M4	

塑料接线盒

PVC JUNCTION BOX (Thickness:1.8MM Material:PVC)

Code: PBOX-22	Code: PBOX-23	Code: PBOX-24	Code: PBOX-25		
Size: 105x105x47mm Ø20.25mm	Size: 105x60x48mm Ø20.25mm	Size: 103x60x47mm Ø20mm	Size: 105x105x42mm Ø20mm		
Code: PBOX-30	Code: PBOX-32	Code: PBOX-33	Code: PBOX-34	Code: PBOX-35	
Size: 85x85x32mm	Size: 120x75x35mm	Size: 105x61x42mm	Size: 95x95x44mm	Size: 106x106x54mm	
Code: PBOX-38	Code: PBOX-38N	Code: PBOX-39	Code: PBOX-39N		
Size: 3"x3"	Size: 3"x3"	Size: 105X63X47mm	Size: 105X63X47mm		
Code: PBOX-40	Code: PBOX-43	Code: PBOX-50	Code: PBOX-62		
Size: 100x100mm	Size: 111x111*50mm	Size: 105x61x47mm	Size: 4"x4"		
Code: PBOX-42	Code: PBOX-41	Code: PBC-H7	Code: PBC-H8	Code: PBC-H9	Code: PBC-H10
Size: 120x70x45mm	Size: 147x86x32mm	Size: 120X80X40mm	Size: 125X84X45mm	Size: 120X120X57mm	Size: 100X100X50mm
		ABS	ABS	ABS	ABS

esta posición se puede girar a 360°

Con nivelación

E 铝锌压铸系列

配电箱、电表底座、路灯系列
其他配件



EMT卡扣

EMT STRAPS

**STEEL * EMT 1 HOLE
RIGID(IMC) 1 HOLE
STRAPS**



ONE HOLE

CAT#	CAT#	SIZE
511	611	1/2
512	612	3/4
513	613	1
514	614	1-1/4
515	615	1-1/2
516	616	2
517	617	2-1/2
518	618	3
519	619	3-1/2
520	620	4

**STEEL* EMT 2 HOLE
RIGID(IMC) 2 HOLE
STRAPS**




TWO HOLE

CAT#	CAT#	SIZE
521	621	1/2
522	622	3/4
523	623	1
524	624	1-1/4
525	625	1-1/2
526	626	2
527	627	2-1/2
528	628	3
529	629	3-1/2
530	630	4

STRUT CLAMPS

STEEL

For EMT,IMC&Rigid Conduit



CAT#	SIZE
2101	1/2
2102	3/4
2103	1
2104	1-1/4
2105	1-1/2
2106	2
2107	2-1/2
2108	3
2109	3-1/2
2110	4

CONDUIT HANGER

STEEL



CAT#	SIZE
721	1/2"
721	3/4"
721	1"
721	1-1/4"
721	1-1/2"
721	2"
721	2-1/2"
721	3"
721	4"

IMC (RIGID) COUPLING

STEEL

CAT#	SIZE
51	1/2
52	3/4
53	1
54	1-1/4
55	1-1/2
56	2
57	2-1/2
58	3
59	3-1/2
60	4



**SPRINKLER CLAMPS
ADJUSTABLE SWIVEL
RING
STEEL**



CAT#	SIZE
731	1/2"
731	3/4"
731	1"
731	1-1/4"
731	1-1/2"
731	2"
731	2-1/2"
731	3"
731	4"
731	5"
731	6"
731	8"



GTLS2-2WAY


Application:

GTLS series are ECONOMY Load Centers which can substitute some of the GTL series Load Centers. they have been designed for safe, reliable distribution and control of electrical power as service entrance equipment in residential, commercial and light industrial premises.

Specifications:

Product Number	Front Type	Main Ampere Rating	Rated voltage (v)	No. of way
GTLS-2WAY	Flush/Surface	40,60	120/240	2
GTLS-4WAY	Flush/Surface	40,100	120/240	4
GTLS-6WAY	Flush/Surface	40,100	120/240	6
GTLS-8WAY	Flush/Surface	40,100	120/240	8

Connection Drawing :

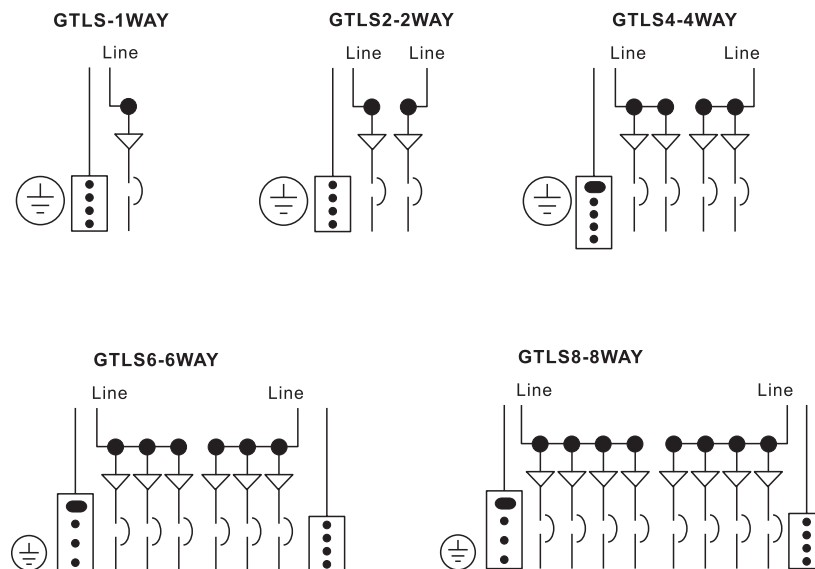

GTLS8-8WAY



GTLS12-12WAY



GTL270S



GTL240S



GTL412C



GTL612F/GTL812F



GTL612FD/GTL812FD

Application:


GT series Load Centers have been designed for safe, reliable distribution and control of electrical power as service entrance equipment in residential, commercial and light industrial premises. They are available in Plug-in designs for indoor applications .

Features:

- Made out of high quality Electro-galvanized steel sheet of up to 1.0-1.5mm thickness.
- Matt-Finish polyester powder coated paint
- Knockouts provided on all sides of the enclosure.
- accept GE's Q Line circuit breakers, including GE's exclusive 1/2" THQPs
- suitable for Single-Phase, Three-Wire, 120/240Vac, rated current to 225A.
- convertible to main breaker
- Wider enclosure offers ease of wiring and move heat dissipation.
- Flush and Surface mounted designs
- Knockouts for cable entry are provided on Top, Bottom of the Enclosure.

Product Number Guide:

Series	GT	M	42	C	G
					<i>Insert for Specials</i> G=Factory installed ground bar M=Factory installed base of main breaker FL=Factory installed feed-through lugs
					<i>Enclosure Type</i> C=Combination surface/flush F=Flush S=Surface R=Outdoor
<i>Type</i> L=Main lug LM=Convertible					<i>Maximum Number 1" Spaces</i> 2,4,6.....42



GTL612FM/GTL812FM



GTL1212CM

GTLS 系列经济型配电箱

GTLS Series Economy Load Centers



GTLS-1 NEW



GTLS-2 NEW



GTLS-4 NEW



GTLS-6 NEW



GTLS-8 NEW

Application:

GTLS series are ECONOMY Load Centers which can substitute some of the GTL series Load Centers. they have been designed for safe, reliable distribution and control of electrical power as service entrance equipment in residential, commercial and light industrial premises.

Specifications:

Product Number	Front Type	Main Ampere Rating	Rated voltage (v)	No. of way
GTLS-B1	Flush/Surface	40,60	120/240	1
GTLS-1NEW	Flush/Surface	40,60	120/240	1
GTLS-2NEW	Flush/Surface	40,60	120/240	2
GTLS-4NEW	Flush/Surface	40,100	120/240	4
GTLS-8NEW	Flush/Surface	40,100	120/240	8

Features:

- Made out of high quality steel sheet of up to 0.8-1.2mm thickness.
- Matt-Finish polyester powder coated paint
- Knockouts provided on all sides of the enclosure.
- accept GE type 1" THQL breakers
- suitable for single-phase ,three-wire, rated current to 10
- Wider enclosure offers ease or wiring and move heat dissipation.
- Flush and Surface mounted designs
- Knockouts for cable entry are provided on Top, Bottom of the Enclosure.

GYB-100圆形电表底座

GYB-100 Round Meter Sockets



GYB-100-1(2 EXIT)



GYB-100-1(1 EXIT)



GYB-100A(2 EXIT)



GYB-100B(2 EXIT)



GYB-100C(2 EXIT)

Application:

- Temporary Service
- Outdoor Advertising
- Small Customer Service
- Other Low Amperage Requirements


Features:

Our enclosure is made of die cast aluminum. The electrostatically applied epoxy and polyester resins, which are baked on, form a durable, light gray exterior. The current carrying parts are of copper alloy. The ground connector is designed to insure a positive electrical connection by effectively clamping the conductor against a serrated surface.

Specification:

Product Number	Description	Fixed Hubs Size
GYB-100B	1Phase,100A,120/240Vac 4jaw	1/2"
		3/4"
		1"
		1-1/4"

Dimensions

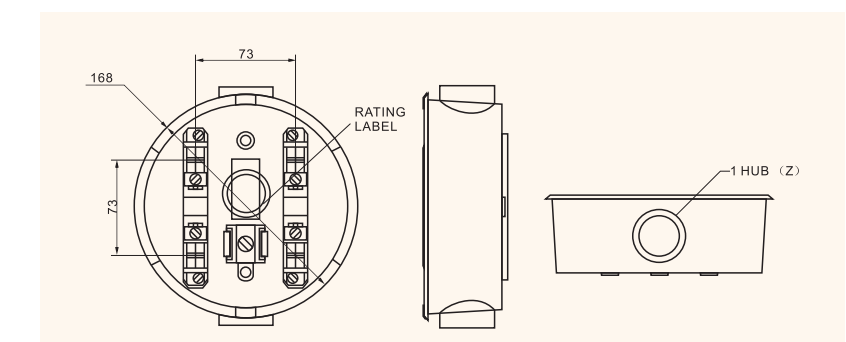


不锈钢密封圈

Stainless Steel Sealing Ring




GSR-1

GSR-2



GSR-3A

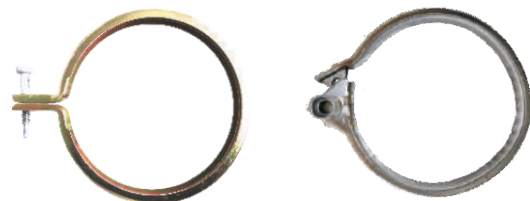

GSR-4A

GSR-5A

Product Number	Description	Thickness
GSR-1	Slip lock type	0.35mm
GSR-2	Screw type	0.35mm
GSR-3A	Screw type	1.2-1.4mm
GSR-4A	Screw type	1.2-1.4mm
GSR-5A	Screw type	1.2-1.4mm



HUB-1"
HUB-1-1/4"
HUB-1-1/2"
HUB-2"
HUB-2-1/2"



RING PARTING
Height 18.5MM
23.5MM



UV PANEL

配件

Replacement Block Assemblies

Use on GYB-100 and GTFP-100A




PB100



PB100A



PB100B



PB100C



PB100D



PB125-4J

Use on GTFP-125A/4J



PB125-5J

Use on GTFP-125A/5J



PB200N-4J

Use on GTFP-200AN/4J, GTFP-200A/7J



PB200-4J

Use on GTFP-200A/4J



PB200N-5J

Use on GTFP-200AN/5J




GTFR200AN-4J

Use on GTFR-200AN/4J




GTFR200AN-5J

Use on GTFR-200AN/5J



GTFR200AN-7J

Use on GTFR-200AN/7J



GTFR200AN-13J


Use on GTFR-200AN/13J

路灯


STREET LIGHT




PHFR-150A E27 150W

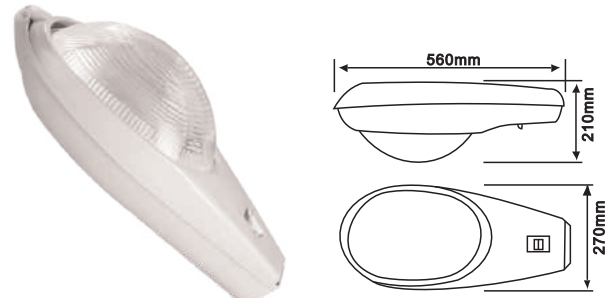

PHFR-150B E27 150W

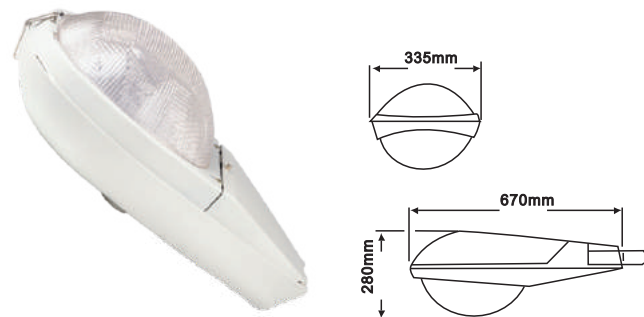

PHFR-250A 250W E40

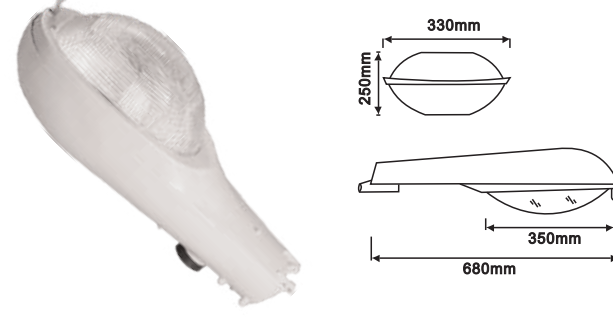

PHFR-250B E40 150W/250W/400W



PA-175MA 9", 12" Reflector
E27 Energy Saving Lamp 45W/65W
E40 Mercury Lamp 175W
LED 12W/15W



PA-175MA-C
9" Reflector 45W/65W
12" Reflector
45W/65W/85W/105W



PHFR-36A E27 36W
PHFR-72A E27 2*36W
PC+ABS

Iron pipe/Aluminum Pipe:



Pipe-A



Pipe-B




Pipe-C

LED路灯

LED STREE LIGHT



PLR-122
20W
AC85-265V
Size: 325*130*75MM

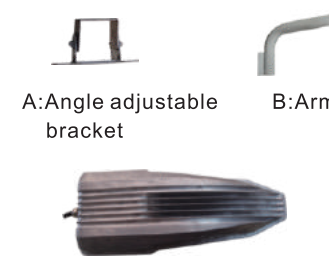

Die-Casting Aluminum Housing
PC Lens



PLR-122A
50W PHOTOCONTROL
AC85-265V
Size: 450*210*100MM




PLR-123
9W
AC85-265V
Size: 325*130*75MM




Plastic Housing
PC Lens



PLR-123A
20W PHOTOCONTROL
AC85-265V
Size: 365*210*100MM

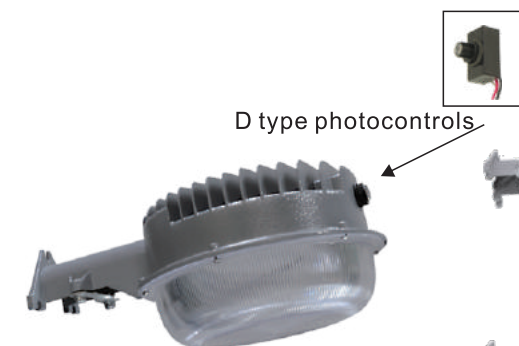

PLR-125
50W
AC85-265V

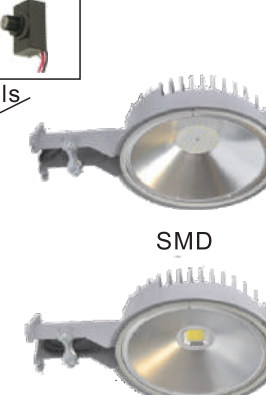

COB



PLR-127
SMD 50W
AC85-265V



PA-175MA-D
12" Reflector
45W/65W/85W/105W



50W
AC85-265V



PLR-116 COB



PLR-117 SMD